


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : H04L 29/12, 12/46		A1	(11) International Publication Number: WO 00/27092
			(43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/CA99/01012		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 October 1999 (29.10.99)			
(30) Priority Data: 2,252,207                      30 October 1998 (30.10.98)                      CA			
(71) Applicant (for all designated States except US): EICON TECHNOLOGY CORPORATION [CA/CA]; 9800 Cavendish Blvd., Montreal, Québec H4M 2V9 (CA).			
(72) Inventors; and (75) Inventors/Applicants (for US only): MOINEAU, Gilbert [CA/CA]; 3255 Dalbé-Viau, Lachine, Québec H8T 3N3 (CA). DUPLAIX, Jérôme [CA/CA]; 4850 Bellechasse, Montréal, Québec H1T 1Z4 (CA).			
(74) Agents: SWABEY OGILVY RENAULT et al.; Suite 1600, 1981 McGill College Avenue, Montréal, Québec H3A 2Y3 (CA).			
		<b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: DNS RELAY MODULE IN A DIGITAL NETWORK MODEM

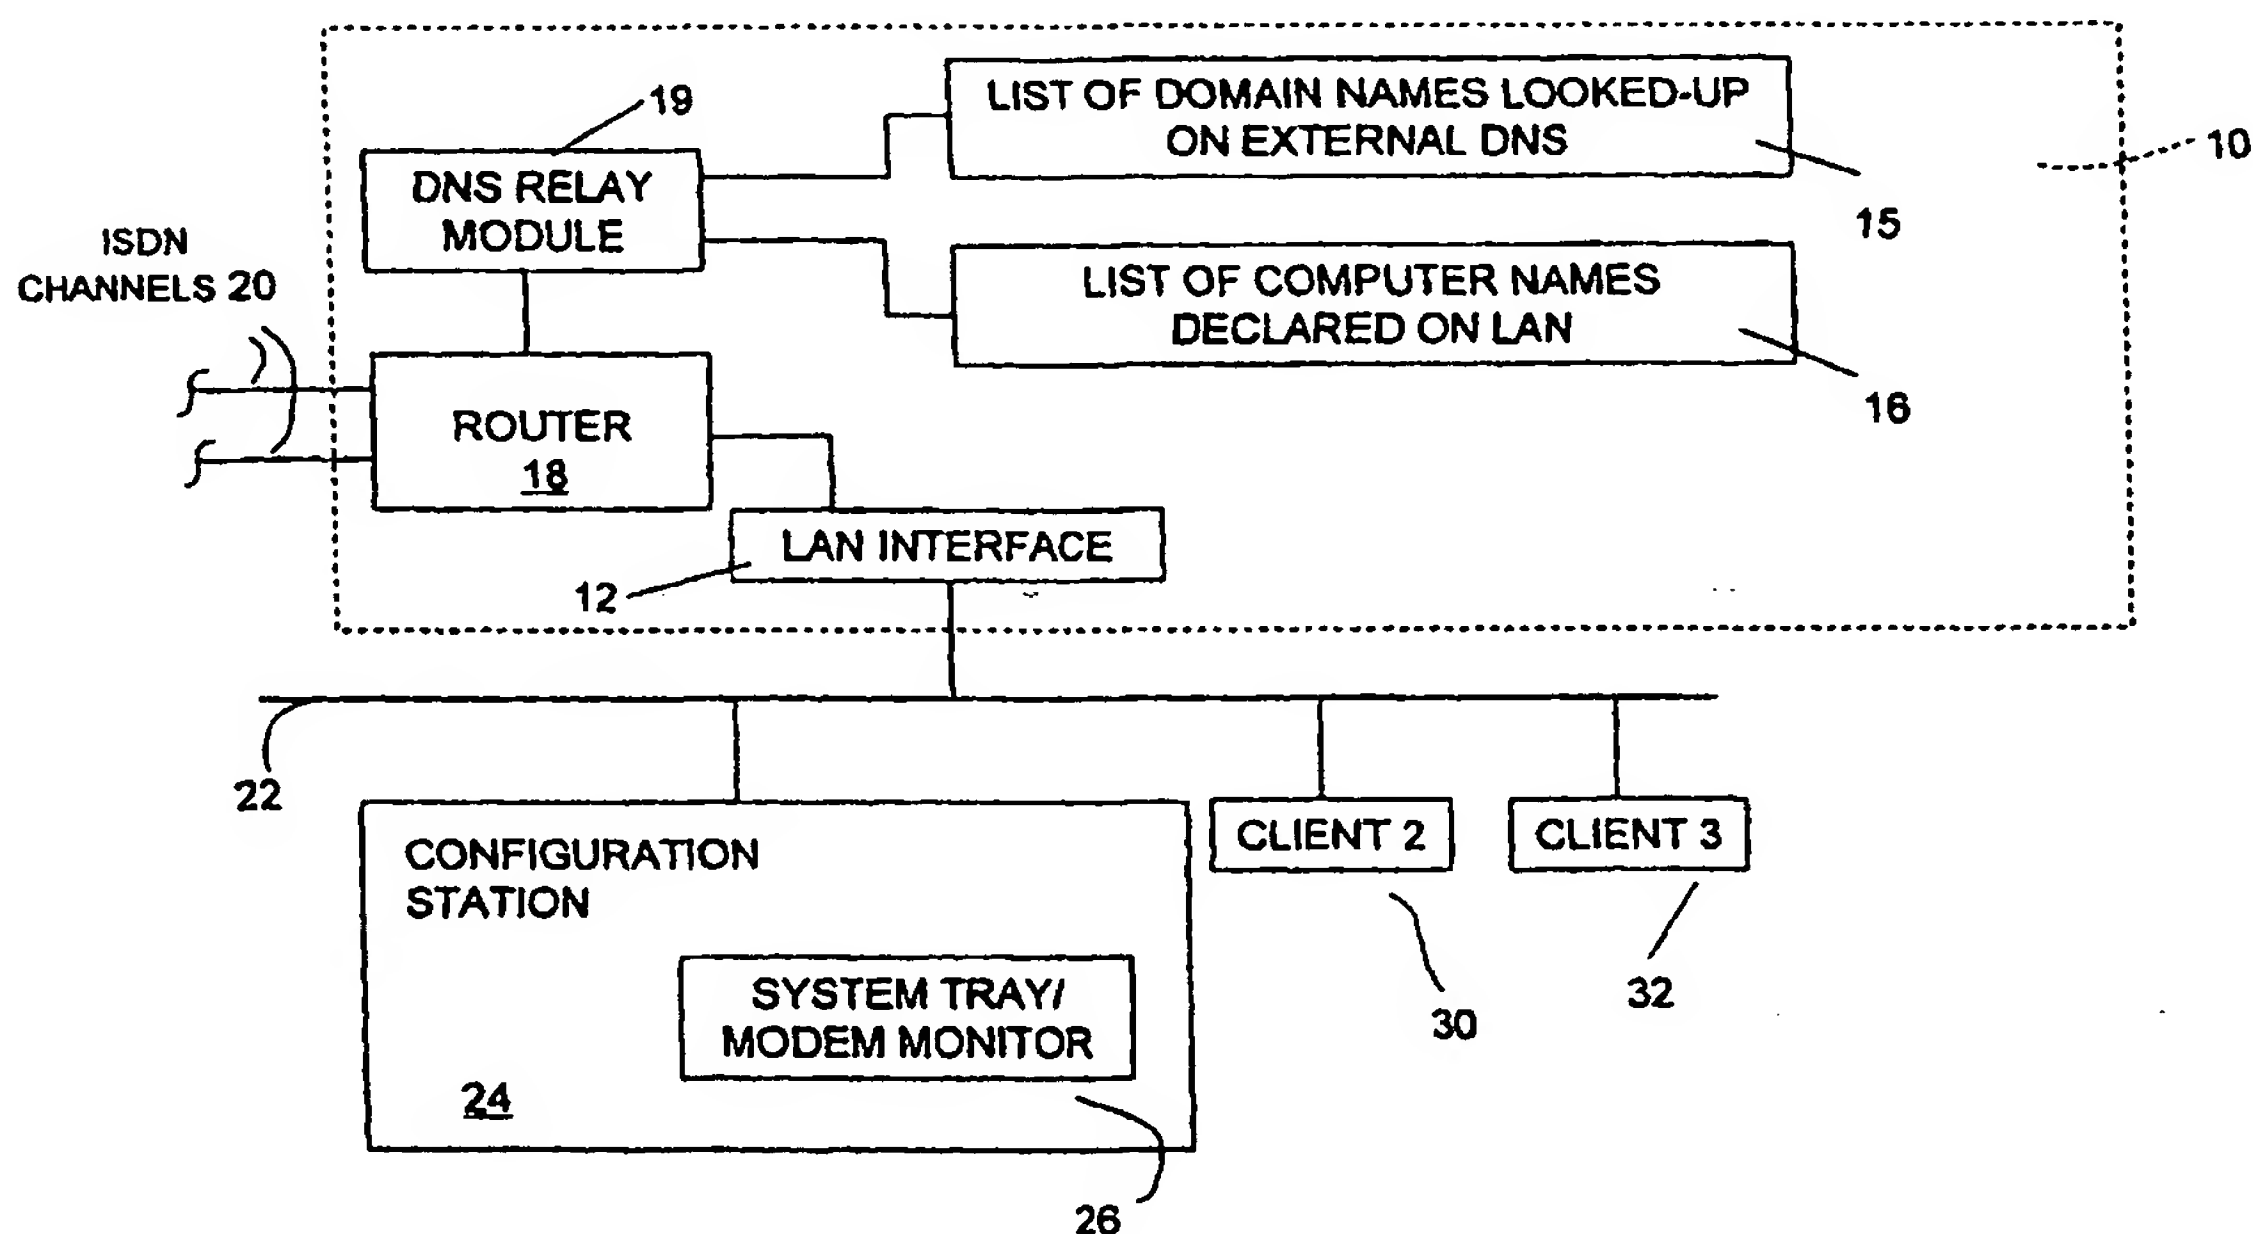

(57) Abstract

The digital network modem has a DNS Relay Module which answers requests for IP addresses using a local store of domain and host names with corresponding IP addresses and forwards the requests to an external DNS if the domain or host name requested is not stored in the local store of addresses. Also, if the numeric address requested is local and in a list of local computer names, the DNS relay module replies to the request acting as a local DNS server. This DNS relay module increases the speed of the request/reply sequence and does not automatically forward all numeric address requests to an external DNS located on a network.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DNS RELAY MODULE IN A DIGITAL NETWORK MODEM

Field of the Invention

The present invention relates to a digital network modem, such as an ISDN or a  
5 DSL modem, and more particularly, pertains to a digital network modem with a  
domain name server relay module.

Background of the Invention

To facilitate accessing and locating computers on a TCP/IP network, a Domain  
-10- Name Service (DNS) is used. This name resolution software enables users to  
refer to computers by domain name or host names. The DNS server maintains a  
database of domain names (host names) and their corresponding IP addresses.  
In an Internet Protocol (IP) network, the application queries a DNS to turn the  
name of the machine it wishes to communicate with into its IP address.  
15 NETwork Basic Input Output System (NetBIOS) is an application  
programming interface that augments the DOS BIOS by adding special  
functions for LANs. It is the native networking protocol in DOS and Windows  
networks. NetBIOS computers are identified by a unique 15-character long  
name, and Windows machines (NetBIOS machines) periodically broadcast  
20 their names on the network so that Network Neighborhood can catalog them.

WINS (Windows Internet Naming Service) runs on Windows NT Server-based  
networks. It is a service that keeps a database of computer name-to-IP address  
mappings so that the NetBIOS computer names used in Windows network  
25 environments can be mapped to IP addresses when the underlying network is  
IP-based. When a user needs to access some computer, the NetBIOS name is  
referenced, and this name is handed to the nearest WINS server, which then  
returns an IP address. WINS is almost completely automatic from an  
administrative point of view. It builds its own database over time and  
30 automatically updates itself.

Computer networks are being installed in more and more residential, office and industrial environments, and the increase in the number of such networks has increased the need for skilled technicians required to configure and maintain such networks. Any simplification of the task of network management is important from the perspective of both increased reliability and reduced training for the network manager. A Local Area Network (LAN) is a communications network that serves users within a confined geographical area. It is made up of servers, workstations, a network operating system and a communications link.

A problem arises when a station on a LAN is requesting an IP address using a domain or host name, especially on small networks when no local DNS is available. The DNS specified for the station will receive the request for the IP address and a connection to the Internet or to an external network will be made to reach the DNS server which will also try to find the domain or host name by verifying the existence of such a domain. In the case where the machine intended was on the LAN, the connection to the external network has caused unnecessary overhead in connection time and costs.

A second problem arises when a station often requests the same external IP address. The DNS must always be contacted through a connection to the external network to reply with the correct IP address. If these repeated connections are in a reduced period of time, it would most probably be unnecessary to request the IP address every time the domain name is to be contacted. This problem slows the connection causing unnecessary costs.

### Summary of the Invention

It would be advantageous to have a DNS on a digital modem, which would readily recognize communication requests between users of the LAN and reply locally while acting as a "local" DNS.

- 5 It would also be advantageous to have a DNS on a digital modem which would forward the requests for external network addresses to an external DNS and which would keep an up-to-date list of the replies received from the external DNS in order to rapidly answer a request for the same IP address at a later time.

10

It is therefore an object of the invention to provide a DNS relay module that provides a rapid response to domain name requests from a local store of IP addresses.

- 15 It is also an object of the present invention to provide a DNS relay module that replies to internal Domain name requests by acting as a local DNS using a list of local hosts names automatically built by looking at NetBIOS over IP packets sent by Windows stations.

- 20 It is furthermore an object of the present invention to provide a DNS relay module that forwards IP address requests to an external DNS.

- It is equally an object to provide such a DNS relay module that manages the sending of requests to more than one external DNSs in a manner transparent to  
25 the LAN clients to provide better efficiency.

It is also an object of the present invention to provide a DNS relay module that fetches, from the local store of IP addresses, the ISDN channel on which the communication should be sent.

According to the invention, there is provided a network modem device connecting a Local Area Network (LAN) to a remote network, comprising a local store containing a list of domain or host names and attribute data and a  
5 Domain Name Service (DNS) relay module. This DNS relay module uses the list and the attribute data to respond to requests for a numeric address in response to a domain name, when the domain name requested is on the list and generates a DNS request to an external DNS on the remote network and returns a reply from the external DNS to respond to the request for a numeric address  
10 when the domain name requested is not on the list. The attribute data can be a numeric address (such as an IP address).

According to a preferred embodiment of the present invention, the attribute data identifies a domain or host name as a local station on the LAN and the  
15 DNS relay module, when the domain or host name is identified as a local station on the LAN, replies locally to said request.

According to another preferred embodiment of the present invention, the DNS delay module listens to NetBIOS Over IP packets of information, extracts local  
20 computer names and IP addresses from the packets and adds these computer names and IP addresses to the list of domain names.

According to another preferred embodiment of the present invention, the list comprises domain names looked-up on the external DNS and the DNS relay  
25 module automatically adds to this list of domain names looked-up on the external DNS, an entry corresponding to the reply from the external DNS.

According to another preferred embodiment of the present invention, the list comprises both domain names looked-up on an external DNS with



corresponding attribute data and host names declared on the LAN with corresponding attribute data.

The invention also provides a method for relaying DNS requests on a LAN  
5 comprising 1. analyzing requests for a numeric address in response to a domain name using a local store containing a list of domain or host names and attribute data, 2. generating a DNS request to an external DNS on the remote network and returning a reply from the external DNS to respond to the request for a numeric address when the domain name requested is not on the list and 3.  
10 replying to the request using the attribute data when the domain name requested is on the list.

#### Brief Description of the Drawings

The invention will be better understood by way of the following detailed  
15 description of a preferred embodiment with reference to the appended drawings, in which:

Fig. 1 is a schematic block diagram of the DNS Relay Module used in a digital modem.

#### 20 Detailed Description of the Preferred Embodiment

As illustrated in Fig. 1, the digital modem 10 according to the preferred embodiment is an ISDN modem having a plurality of functional components shown in Fig. 1. The separation of components illustrated in the separate blocks in Fig. 1 is for the purposes of illustration only, and does not necessarily reflect  
25 the physical separation of components in the real device which is built from both hardware and software/firmware components.

Modem 10 acts as a router or gateway to a remote network via, in the preferred embodiment, an ISDN connection 20. In the preferred embodiment, one

channel of the ISDN line is connected to an Internet Service Provider (ISP) for Internet access, while the other channel is connected to a "private" intranet. When the modem 10 is connected to the Ethernet local area network (LAN) 22 and powered up, a LAN interface 12 and a System Tray / Modem Monitor 26  
5 become active. The modem 10 includes a router 18 which communicates over connection 20 and with LAN interface 12. In operation, the modem 10 directs data traffic via router 18 onto the selected ISDN channel 20. Devices on LAN 22 send packets of information to one of the ISDN channels by sending a packet addressed to the modem 10 with the desired destination IP address and  
10 message content contained in the packet. The router 18 forwards the message on one of the ISDN channels to the desired IP address.

In the reverse direction, router 18 receives packets from lines 20 and determines the desired destination on LAN 22, and forwards the packets via  
15 interface 12 on LAN 22 with the correct desired destination address. In the preferred embodiment in which one channel is used for the intranet and the other for the Internet, router 18 also switches packets received from the LAN 22 based on the desired address either to the Internet channel or the intranet channel. Of course, both channels could be used for intranet or Internet  
20 purposes, or even for connecting to a different type of data network.

Modem 10 includes, in the preferred embodiment, a DNS relay module 19. From the devices' point of view on the LAN 22, DNS Relay Module 19 becomes the primary DNS that they can refer to. Thus, in accordance with  
25 TCP/IP, when an address is requested by domain name or host name, instead of using an IP address, the device sends a request to the DNS for the IP address for the domain or host name.



The DNS relay module 19 is however not a full DNS. The advantage of identifying module 19 as a DNS for the devices on the LAN 22 is that module 19 can contain lists of frequently-used domain names and can give specific responses immediately for those domain names, while other domain name requests can be passed on to a remote DNS, such as an ISP DNS. Furthermore, the domain name for an internal corporate domain name may be contained in module 19 or in a readily accessible list. For the requests to an internal corporate domain name, the IP address is returned directly instead of using the ISP DNS constantly. Fewer requests to the ISP DNS means faster service. Also, some intranet addresses may not be known to the outside world (private addresses) and the ISP DNS, for example. The DNS relay module 19 is also used to route the DNS requests to the Intranet DNS or the ISP DNS.

In the preferred embodiment of the present invention, the DNS Relay Module 19 compares the request from a station (24,30,32) on LAN 22 with at least one list. The list 15 can be configured and built by the Network Administrator using the Configuration station 24. Examples of useful lists are the following: a list of frequently-accessed domains, a list 15 of Domain names recently looked up on an external DNS, another list 16 of computer names declared on the LAN automatically built by looking at NetBIOS Over IP packets. These lists comprise the name of the domain or computer requested and the corresponding IP address. These lists would be consulted by the DNS Relay Module in an order appropriate for fastest results. In a preferred embodiment, the DNS Relay Module 19 consults two of these lists: the list 15 of domain names looked-up on an external DNS and the list 16 of computer names declared on its LAN. And, also in a preferred embodiment, the DNS consults the list 16 of computer names first, before consulting the list 15 of domain names.

These lists can be built up in many ways. A first manner is to make a new entry in the lists each time an IP address unknown from the lists is returned by the external DNS. In the case that the domain name or host name requested by a device on the LAN 22 is unknown to the DNS Relay Module 19 (i.e. it does not appear on any of its lists), the DNS Relay Module 19 forwards the request to an external DNS such as an ISP DNS. The DNS Relay Module 19 records the answer sent from the ISP DNS back to the device on the LAN 22 and adds this entry to one of its lists. These new entries can have an "expiry date". The life of an IP address can be set, for example, for one day. After a day, the DNS Relay Device 19 would forward the request to an external DNS as if the entry did not exist in the list and would record the reply. Since the local store on which these addresses are stored can be a stack, a First In, First Out queue could provide best results. Also, it should be possible at any time to reset these lists. When the table or list is full, the older entry is overwritten by the new one. The possibility of an overflow of addresses can also be eliminated by limiting the list to a certain amount of entries.

A second manner to make a new entry is to manually edit the lists. Only authorized users such as network administrators should be able to look at and edit the lists using the System Tray / Modem Monitor interface 26. These lists could be maintained manually for known changes in domain names or computer names.

DNS relay module 19 can also make use of the NETBIOS Over IP protocol supported in Microsoft Operating systems (Windows 95, 98 and NT). Using this protocol, the stations (24,30,32) on the LAN 22 advertise their computer (host) names and IP addresses. By intercepting these packets, the DNS relay module 19 can learn the DNS name of the PCs on the local LAN 22 and can store this information in a list (16). When a request for an IP address

corresponding to an entry in that list is made, the DNS relay module replies to the request while acting as a local DNS.

5 In the preferred embodiment where one channel is for the Internet and the other channel is for the intranet, the DNS relay module 19 only routes DNS requests , based on the domain name included inside the request. For example, xxx.mycompany.com would be identified as an intranet address and xxx.ibm.com would be referred as an Internet address. Any other packets are routed by (18).

10

Of course, once the DNS Relay Module 19 has returned an IP address for the domain or computer name to the station, the communications request will be routed by router 18 to the appropriate channel of ISDN connection 20, either intranet or internet.

15

The DNS relay module 19 can also contain two or more external DNS addresses. When a request for a domain name that was sent to the external DNS fails for a certain amount of failures (preferably only after two failures), the module 19 switches to using another one of the plurality of external DNS  
20 addresses. In this way, greater reliability and efficiency for accessing domain names from the LAN 22 is afforded. The stations (24,30,32) on the LAN 22 only need to know one DNS address, that of the DNS Relay Module 19 while in fact they have the benefit of multiple DNS working for them.

25 While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modifications and this application is intended to cover any variations, uses, or adaptations of the invention following, in general, the principles of the invention and including such departures from the present disclosure as come

- 10 -

within known or customary practice within the art to which the invention pertains and as may be applied to the essential features hereinbefore set forth, and as follows in the scope of the appended claims.

## CLAIMS

1. A network modem device connecting a Local Area Network (LAN) to a remote network, comprising:  
a local store containing a list of domain or host names and attribute data; and  
a Domain Name Service (DNS) relay module  
using said list and said attribute data to respond to requests for a numeric address in response to a domain name, when said domain name requested is on said list and  
generating a DNS request to an external DNS on said remote network and  
returning a reply from said external DNS to respond to said request for a numeric address when said domain name requested is not on said list.
2. A network modem device as claimed in claim 1, wherein said attribute data is an IP address.
3. A network modem device as claimed in claim 1, wherein said attribute data identifies a domain or host name as a local station on said LAN and said DNS relay module, when said domain or host name is identified as a local station on said LAN, replies locally to said request.
4. A network modem device as claimed in claim 1, wherein said Domain Name Server relay module is connected to a router and wherein said router is connected to at least one ISDN channel.
5. A network modem device as claimed in claim 4, wherein said router is connected to two ISDN channels: one for the intranet and one for the Internet.

6. A network modem device as claimed in claim 3, wherein said DNS delay module listens to NetBIOS Over IP packets of information, extracts local computer names and associated IP addresses from said packets, adds said computer names and associated IP addresses to said list of domain names.

7. A network modem device as claimed in claim 2, wherein said list is a list of domain names looked-up on the external DNS, and said DNS relay module automatically adds to said list of domain names looked-up on the external DNS, an entry corresponding to said reply from said external DNS.

8. The device according to claim 1, wherein said device is a digital network modem.

9. The device according to claim 8, wherein said device is an ISDN modem.

10. The device according to claim 1, wherein said list comprises :  
a list of domain names looked-up on an external DNS with corresponding attribute data; and  
a list of host names declared on said LAN with corresponding attribute data.

11. The device according to claim 1, wherein said external DNS is one of a group of external DNSs.

12. The device as claimed in claim 1, wherein said list of domain names and attribute data has an expiry date and time, and said DNS relay module comprises a mechanism for requesting from an external DNS a newly fetched numeric address for said domain name when a next request for said domain name will be received, for restoring said newly fetched numeric address as the



attribute data for said domain name in said list and for refreshing said expiry date and time.

13. A method for relaying DNS requests on a LAN comprising:  
analyzing requests for a numeric address in response to a domain name using a local store containing a list of domain or host names and attribute data;  
generating a DNS request to an external DNS on said remote network and  
returning a reply from said external DNS to respond to said request for a numeric address when said domain name requested is not on said list;  
replying to said request using said attribute data when said domain name requested is on said list.

14. A method as claimed in claim 13, wherein said attribute data identifies a domain name as a domain name for a device on said LAN.

15. A method as claimed in claim 13, wherein said replying involves not requesting a numeric address on said external DNS and responding to said request with a numeric address corresponding to said domain or host name.

16. A method as claimed in claim 13, wherein said attribute data is an IP address.

17. A method as claimed in claim 14, further comprising steps of listening to NetBIOS Over IP packets of information, extracting local computer names and IP addresses from said packets and adding said computer names and IP addresses to said list of domain names.

18. A method as claimed in claim 17, wherein said list of computer names declared on the LAN is automatically built using packets of information sent by

stations on said LAN using NetBIOS Over IP protocol in which said station name and IP address is available.

19. A method as claimed in claim 13, further comprising a step of automatically adding to said list of domain names looked-up on the external DNS, an entry corresponding to said reply from said external DNS and wherein said list is a list of domain names looked-up on the external DNS.

20. A method as claimed in claim 13, wherein said list comprises :  
a list of domain names looked-up on an external DNS with corresponding attribute data; and  
a list of host names declared on said LAN with corresponding attribute data.

21. A method as claimed in claim 13, wherein said external DNS is one of a group of external DNSs.

22. A method as claimed in claim 13, wherein said list of domain names and attribute data has an expiry date and time and said method further comprises the steps of  
requesting from an external DNS, a newly fetched numeric address for said domain name when a next request for said domain name will be received,  
restoring said newly fetched numeric address as the attribute data for said domain name in said list and  
refreshing said expiry date and time.

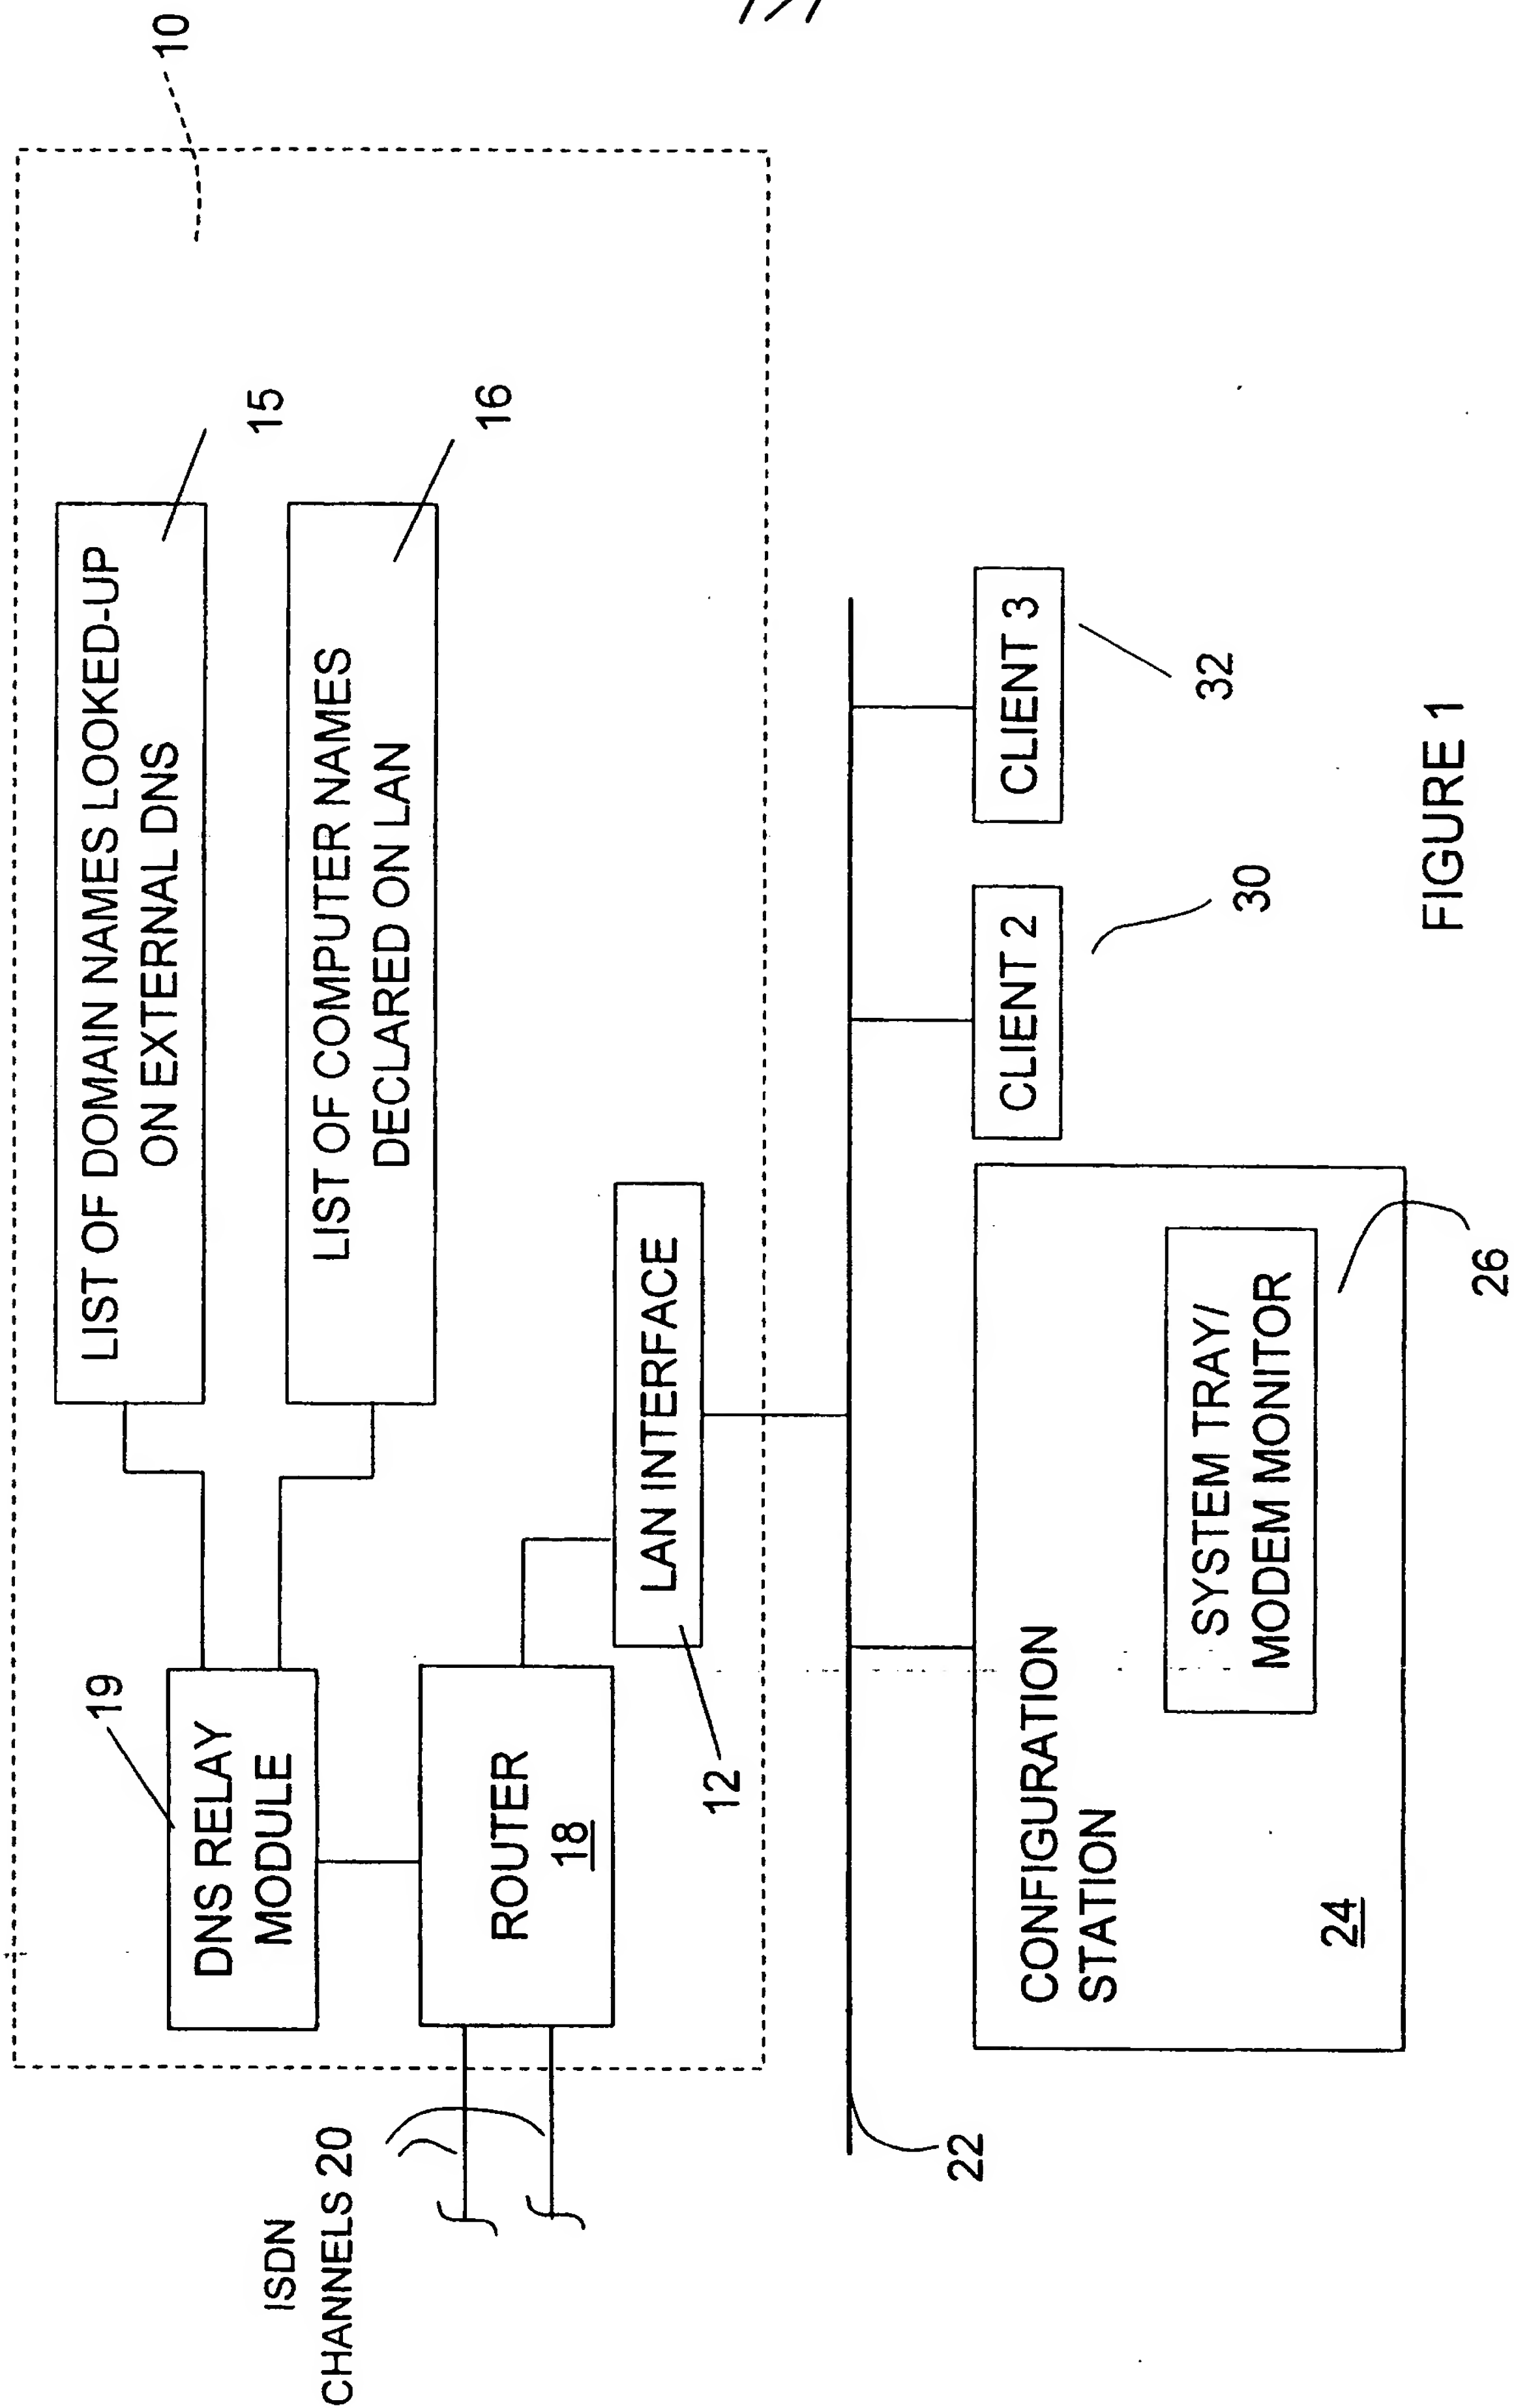


FIGURE 1

# INTERNATIONAL SEARCH REPORT

Int'l Application No  
**PCT/CA 99/01012**

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L29/12 H04L12/46

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>ROWE K E ET AL: "Reliability of WWW name servers"</p> <p>COMPUTER NETWORKS AND ISDN SYSTEMS, NL, NORTH HOLLAND PUBLISHING. AMSTERDAM,</p> <p>vol. 27, no. 6, 1 April 1995 (1995-04-01), pages 773-780, XP004013179</p> <p>ISSN: 0169-7552</p>	13-16, 19, 21
Y	abstract	1, 2, 4, 7-9, 11
A	<p>page 773, left-hand column, line 1 -right-hand column, line 11</p> <p>page 775, right-hand column, line 11 -page 776, left-hand column, line 28</p> <p>figure 1</p>	3, 5, 10, 12, 17, 20, 22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

**10 March 2000**

Date of mailing of the international search report

**23/03/2000**

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

**Lievens, K**

# INTERNATIONAL SEARCH REPORT

Int'l Patent Application No  
PCT/CA 99/01012

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 26548 A (WHISTLE COMMUNICATIONS CORP ;COBBS ARCHIE L (US); LI JIM Y (US); 0) 18 June 1998 (1998-06-18)	1,2,4, 7-9,11
A	abstract  page 1, line 27 -page 4, line 32 page 6, line 12-15 page 7, line 17 -page 10, line 30 page 11, line 32 -page 12, line 11 page 15, line 17-23 page 17, line 18 -page 20, line 32 figure 6	3,5,10, 12,17, 20,22
A	"NETBIOS ADD.NAME IN SWITCHED NETWORKS" IBM TECHNICAL DISCLOSURE BULLETIN,US,IBM CORP.,NEW YORK, vol. 35, no. 2, 1 July 1992 (1992-07-01), pages 404-407, XP000313337 ISSN: 0018-8689 page 404, line 1-41	6,17,18, 20

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 99/01012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9826548 A	18-06-1998	US 6012088 A	04-01-2000
		AU 3572697 A	03-07-1998
		EP 0953248 A	03-11-1999

Form PCT/ISA/210 (patent family annex) (July 1992)



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**